

Eurosafes

PTK E-300


EN 1143-1 Grade 0 to IV (ECB-S)
 NT Fire 017 – 60 Paper (Grade 0 to III)
 EN 15659 – LFS 30 P (Grade IV)

Key features

- Designed for offices
- Burglary tested and certified according to Euronorm EN 1143-1 Grade 0 to IV (ECB-S)
- Fire protection for 60 minutes according to NT Fire 017 – 60 Paper (Grade 0 to III)
- Fire protection for 30 minutes according to EN 15659 – LFS 30 P (Grade IV)
- Unpickable keylock with two changeable keys as standard (E4 grade with two locks)
- Wide range of locking options and accessories
- Standard colour light grey, RAL 7035
- Easily installed – the smallest size can even be placed under a desk
- Sliding bolts on all four sides of the door protect against burglary attack and keep the door tightly closed in case of fire
- Floor anchoring as standard
- Internal fittings adjustable at 25 mm pitch
- Light weight, all under 1000 kg

Options and fittings


- Combination lock or electronic codelock
- Option for two locks
- Adjustable plain shelf
- Pull-out multi-purpose shelf
- Pull-out suspension file frame
- Pull-out worktop
- Lockable inner box
- Lockable Data Media Box MI-400
- Pull-out keyrack
- Pull-out key compartment shelf
- Pull-out key shelf
- Full RAL range available for colouring
- Right or left handed opening
- Safety deposit lockers

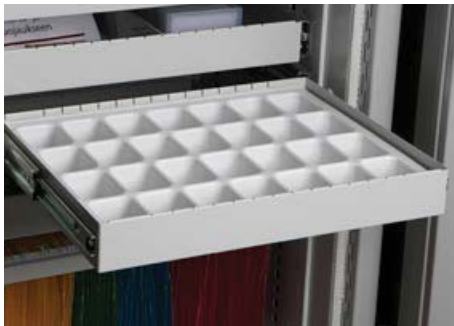

Eurosafes

PTK E-300

EN 1143-1 Grade 0 to IV (ECB-S)
 NT Fire 017 – 60 Paper (Grade 0 to III)
 EN 15659 – LFS 30 P (Grade IV)

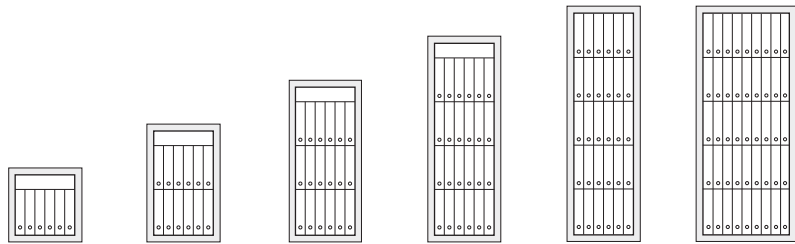**Specifications**

Model	E-310	E-320	E-330	E-340	E-350	E-370
PTK-SERIES	E1-310	E1-320	E1-330	E1-340	E1-350	E1-370
	E2-310	E2-320	E2-330	E2-340	E2-350	E2-370
	E3-310	E3-320	E3-330	E3-340	E3-350	E3-370
	E4-310	E4-320	E4-330	E4-340	E4-350	E4-370

External

Height (mm)	612	962	1312	1662	1912	1912
Width (mm)	634	634	634	634	634	848
Depth (mm)	550	550	550	550	550	692

Internal

Height (mm)	493	843	1193	1543	1793	1793
Width (mm)	486	486	486	486	486	700
Depth (mm)	364	364	364	364	364	506
Volume (l)	87	149	211	273	317	635
A4 file capacity (pcs)	6–9	12–18	18–27	24–36	30–45	40–70
Weight (kg) E/E1	180	260	340	420	470	650
Weight (kg) E2	220	300	390	470	500	750
Weight (kg) E3	250	340	430	530	580	850
Weight (kg) E4	280	380	490	610	670	970